


**NOTES:**

1. PLANTING SOIL MIXTURE: BACKFILL WITH NATIVE TOPSOIL.
2. PLANTING PIT WILL BE THE SAME DEPTH AS THE ROOTBALL AND 300 WIDER AROUND DIAMETER OF ROOTBALL.
3. ROOT COLLAR OF PLANT WILL BEAR SAME RELATIONSHIP TO FINISHED GRADE, AFTER SETTLEMENT, AS EXHIBITED IN NURSERY / POT.
4. IN HEAVY CLAY OR POORLY DRAINED SOILS, PLANT MATERIAL WILL BE INSTALLED SO THAT ROOT COLLAR IS 75-100 ABOVE ADJACENT FINISHED GRADE.
5. APPLY ADEQUATE WATER AND INSTALL MULCH IMMEDIATELY AFTER INSTALLATION OF PLANT MATERIAL.


**STAKE AND GUY**

THREE (3) WOOD STAKES - 50 x 50 x 2400  
 WRAP ARBORTIE LOOSELY AROUND TRUNK OF TREE AND STAKES, ALLOWING MOVEMENT OF TREE. FOLD ENDS OF ARBORTIE BACK AND SECURE TO STAKE WITH 1" GALVANIZED ROOFING NAIL. (SEE DETAIL 'A' BELOW)  
 STAKES ARE TO BE SPACED EQUALLY AROUND THE TREE.

**DETAIL A**

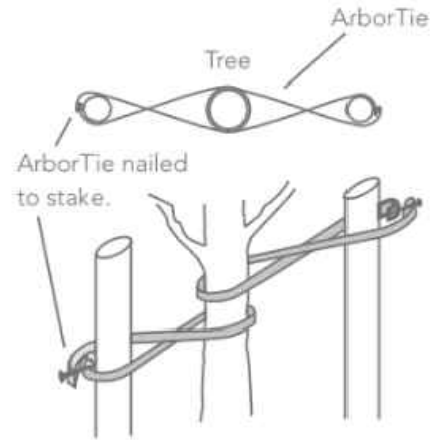

DO NOT CUT LEADER

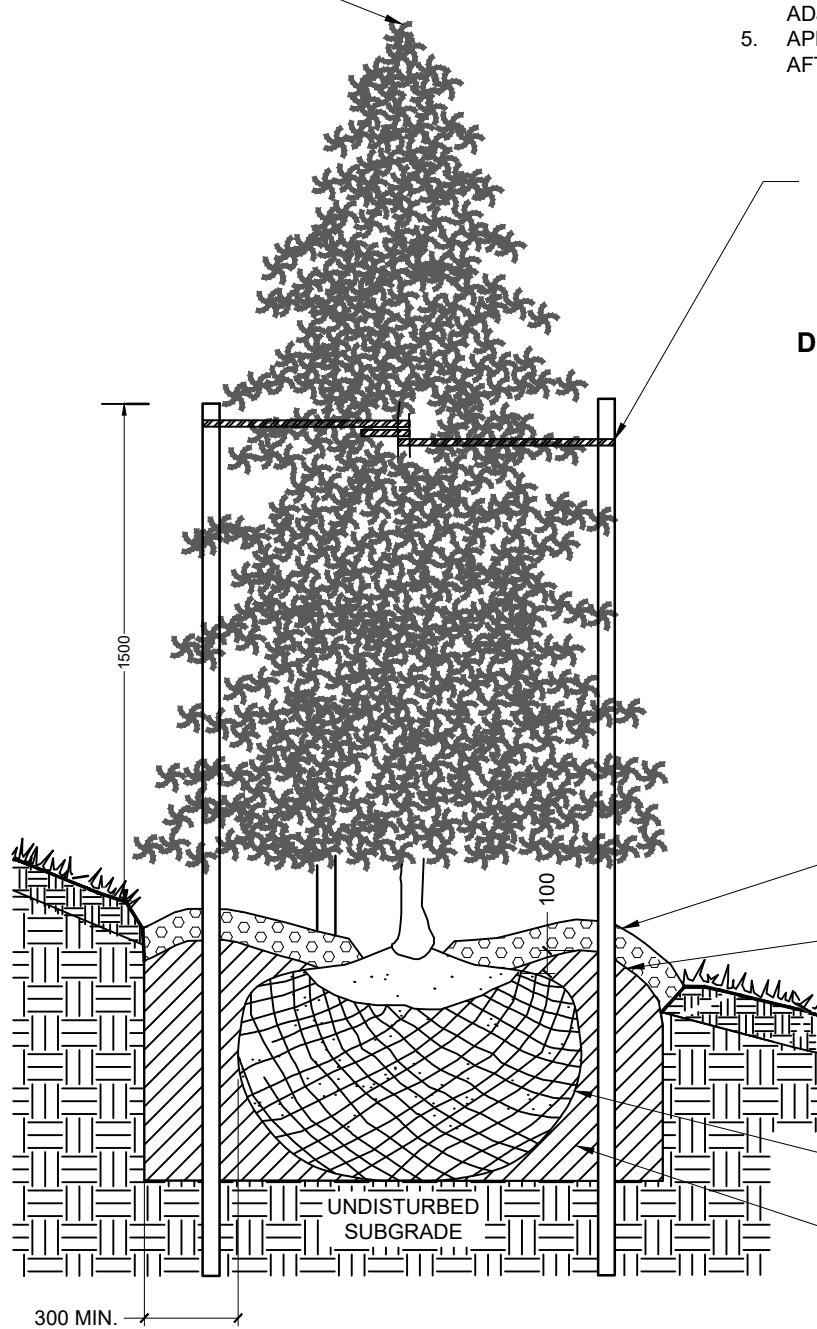

100 DEPTH PINE BARK MULCH (AFTER SETTLEMENT).  
 KEEP MULCH 100 AWAY FROM TRUNK.

EARTHEN SAUCER  
 100 HIGH x 200 WIDE  
 INSTALL AROUND PERIMETER OF PLANTING PIT  
 IMMEDIATELY SOAK SAUCER AFTER INSTALLATION

FINISHED GRADE

REMOVE WIRE BASKET, ALL ROPE, AND BURLAP  
 FROM TOP  $\frac{1}{3}$  OF ROOTBALL BEFORE BACKFILLING

BACKFILL WITH NATIVE TOPSOIL

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SHOWN.

**STANDARD DRAWING**

REV 1

MAY 2023

**PLANTING DETAIL  
 CONIFEROUS TREE ON SLOPE**

THE CITY OF  
**Waterloo**

**CW-726**